




Blind operation mechanism at either Right or Left side of window. Can be fitted close to corner of room without any inconvenience. Depth of unit 17,6 mm for slim double-glazing window system. New fine 12,5 mm wide blind slats. Frame, headrail and bottom and side channels from PVC for superior thermal and acoustic insulation in extreme climatic conditions.

Options

Orientation side	1100	Right
	1101	Left
Orientation system	1231	Magnetic handle

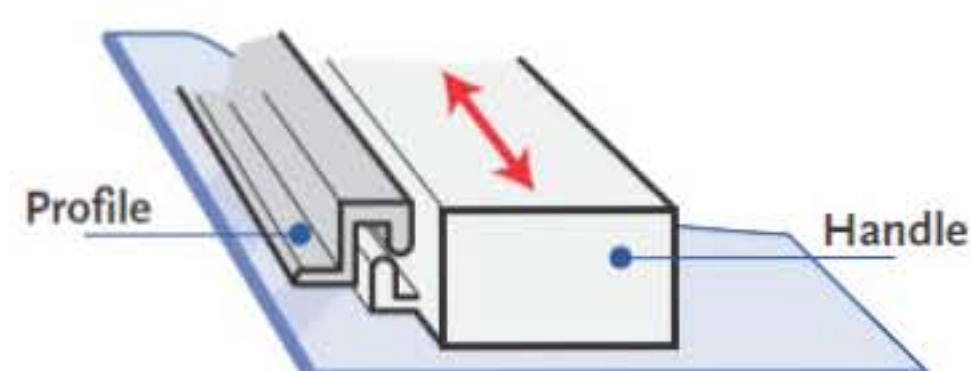


Properties

Slats	Material	Crowned high tensile aluminium
	Size	Width 12,5 mm
Cords	Cords	Polyester 1,3 mm
	Ladder string	Polyester width 15 mm Distance between ladder rungs 10 mm

Integral Blinds | Integrated Blinds | Interstitial Blinds

Sealed Unit Blinds in between Double Glazing

General topics system AC2

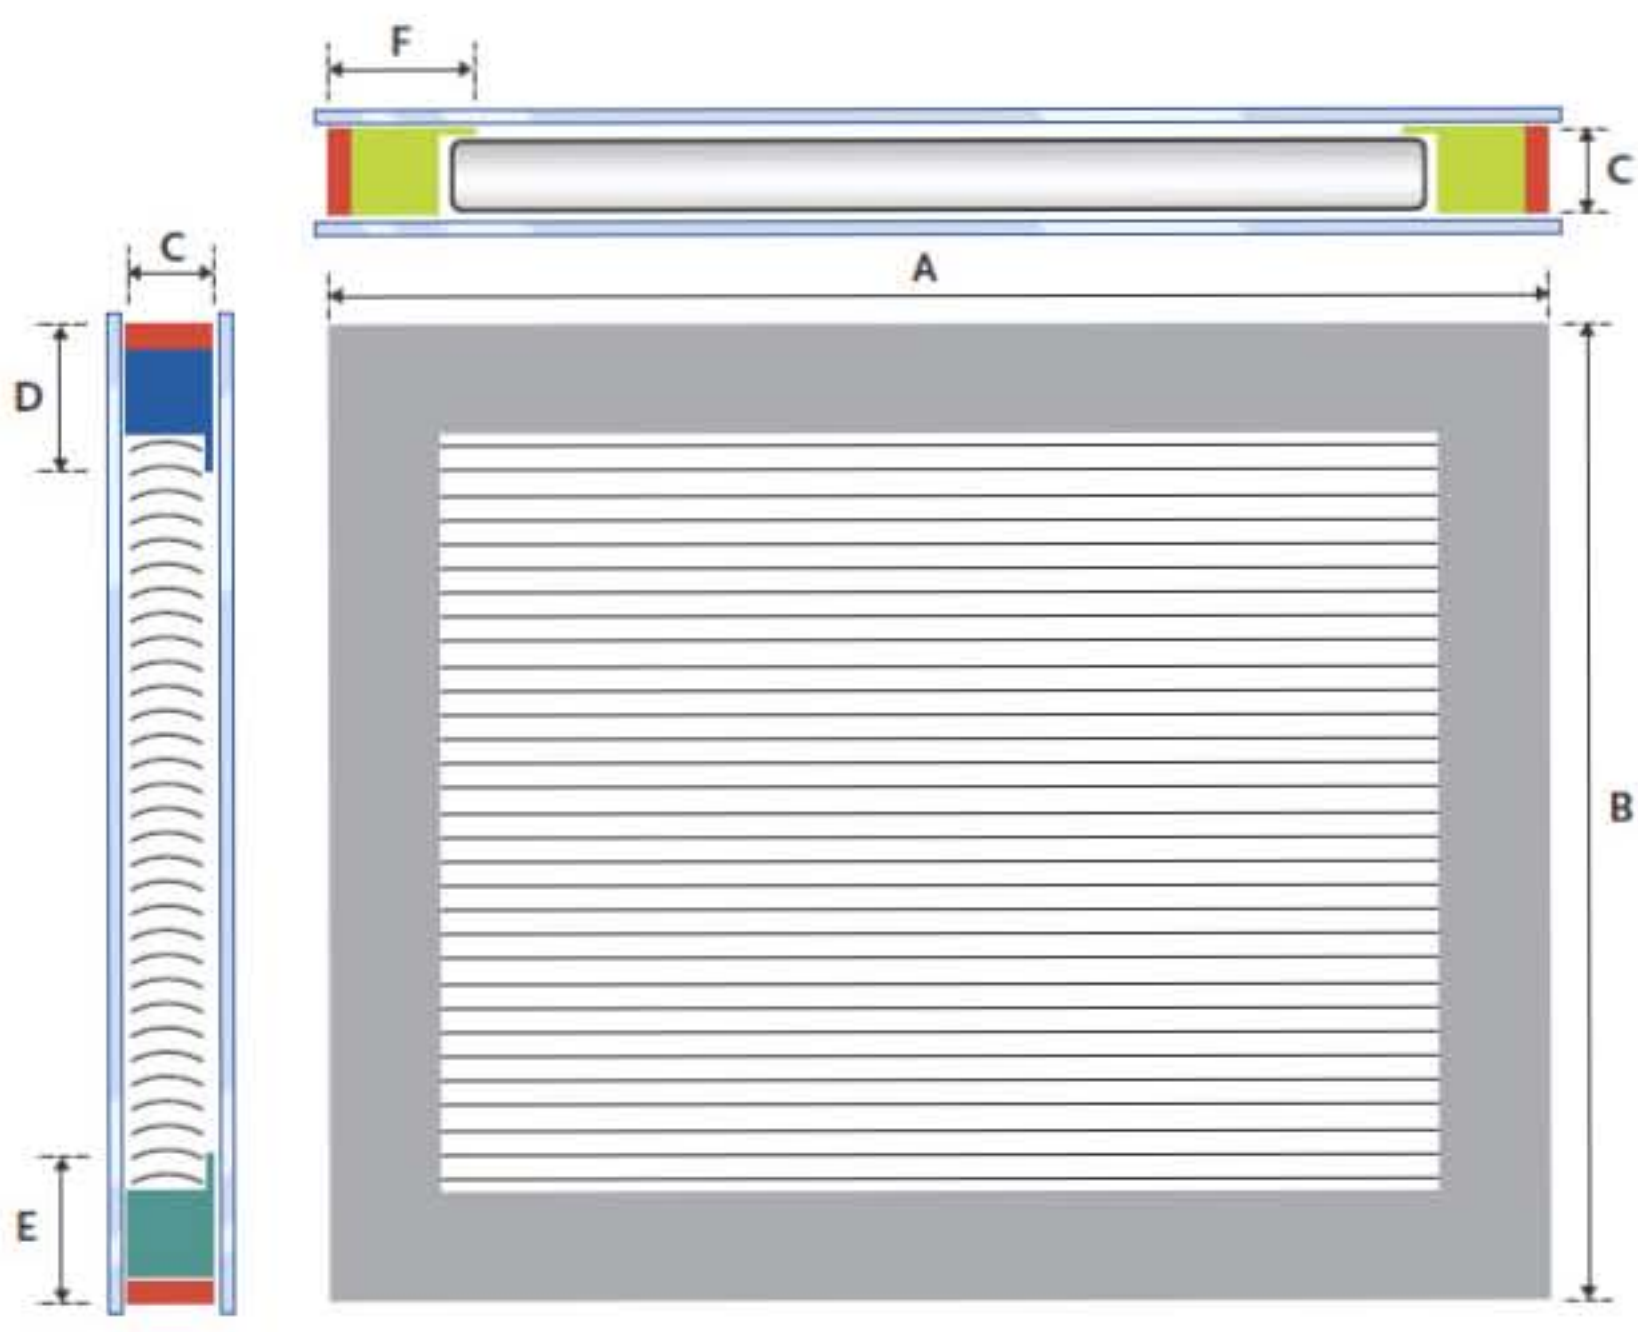


Ref.	Description	Size in mm
A	Width	As needed ')
B	Height	As needed ')
C	Depth	17,6
D	Top	40,0
E	Bottom	40,0
F	Side	40,0


- B**
- Head rail
 - Side channel
 - Bottom channel
 - Frame

Limitations in cm ')		
	Width	Height
Maximum	200	220
Minimum	30	50

Orientation sides

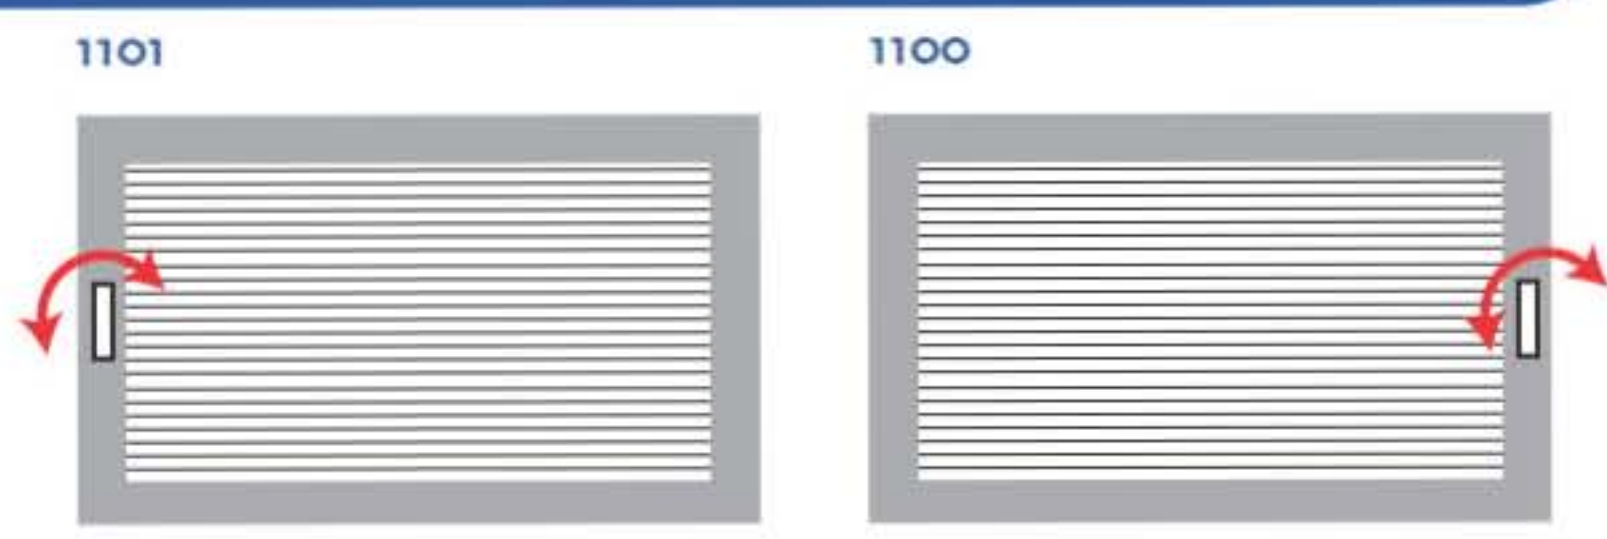

Profiles

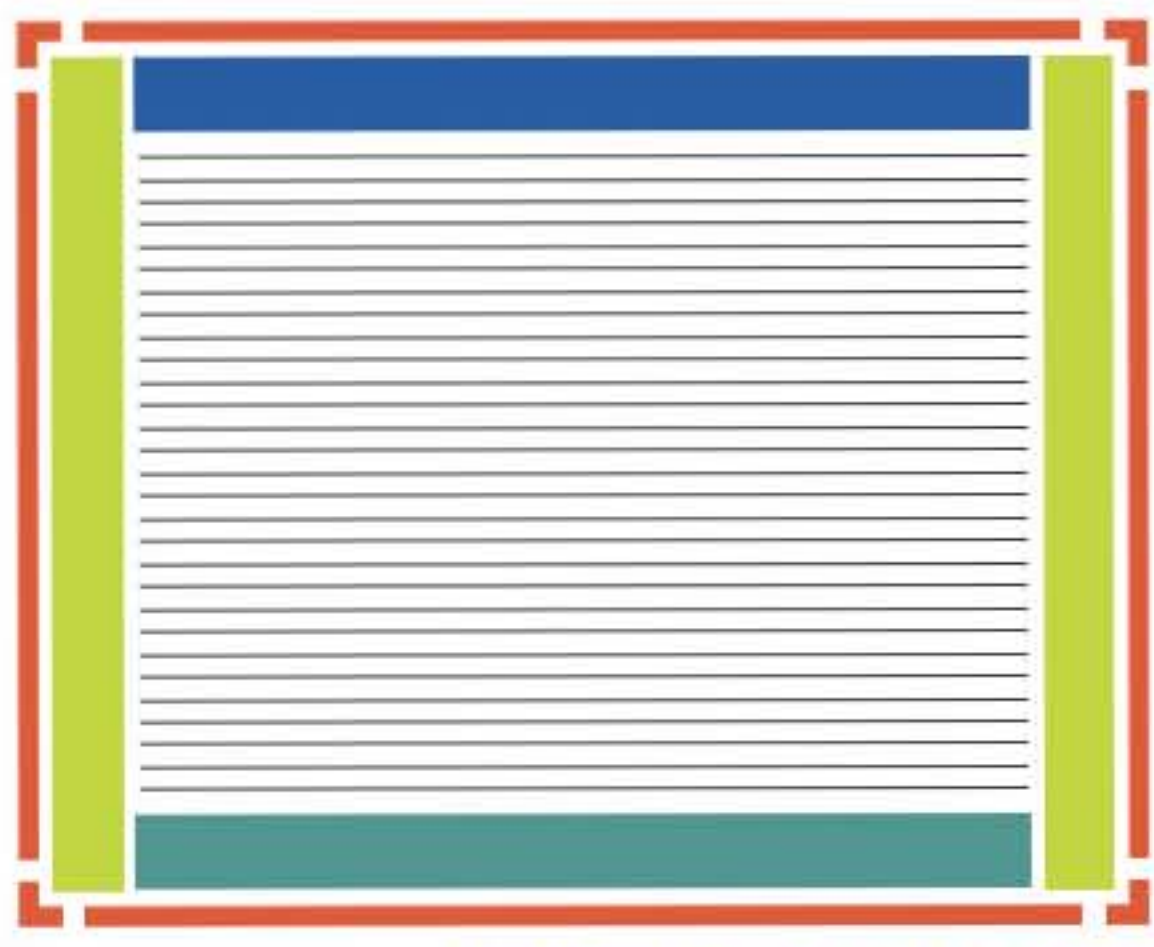

Description	Type	Size in mm	Material
Head rail		32 x 25,4 x 17,6	PVC
Bottom channel		32 x 25,4 x 17,6	PVC.
Side channel		32 x 25,4 x 17,6	PVC
Frame		17,6 x 8	PVC.
Magnetic holder profile		11 x 6	Aluminium