




Blind operating mechanism at Top of window for low windows or at Bottom for windows high in wall. Depth of unit 17,6 mm for slim double-glazing window system. New fine 12,5 mm wide blind slats. Frame, headrail and bottom channel from PVC for superior thermal and acoustic insulation.

Options

Orientation side	1102	Bottom
	1105	Top
Orientation system	1231	Magnetic handle

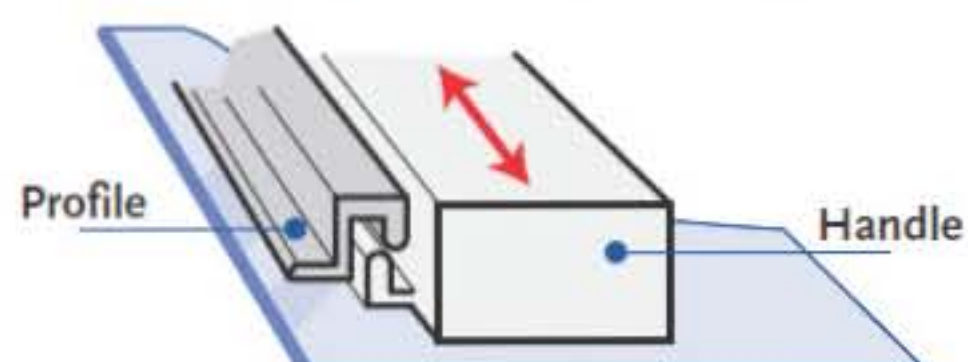


Properties

Slats	Material	Crowned high tensile aluminium
	Size	Width 12,5 mm
Cords	Cords	Polyester 1,3 mm
	Ladder string	Polyester width 15 mm Distance between ladder rungs 10 mm

Integral Blinds | Integrated Blinds | Interstitial Blinds

Sealed Unit Blinds in between Double Glazing


General topics system AC2

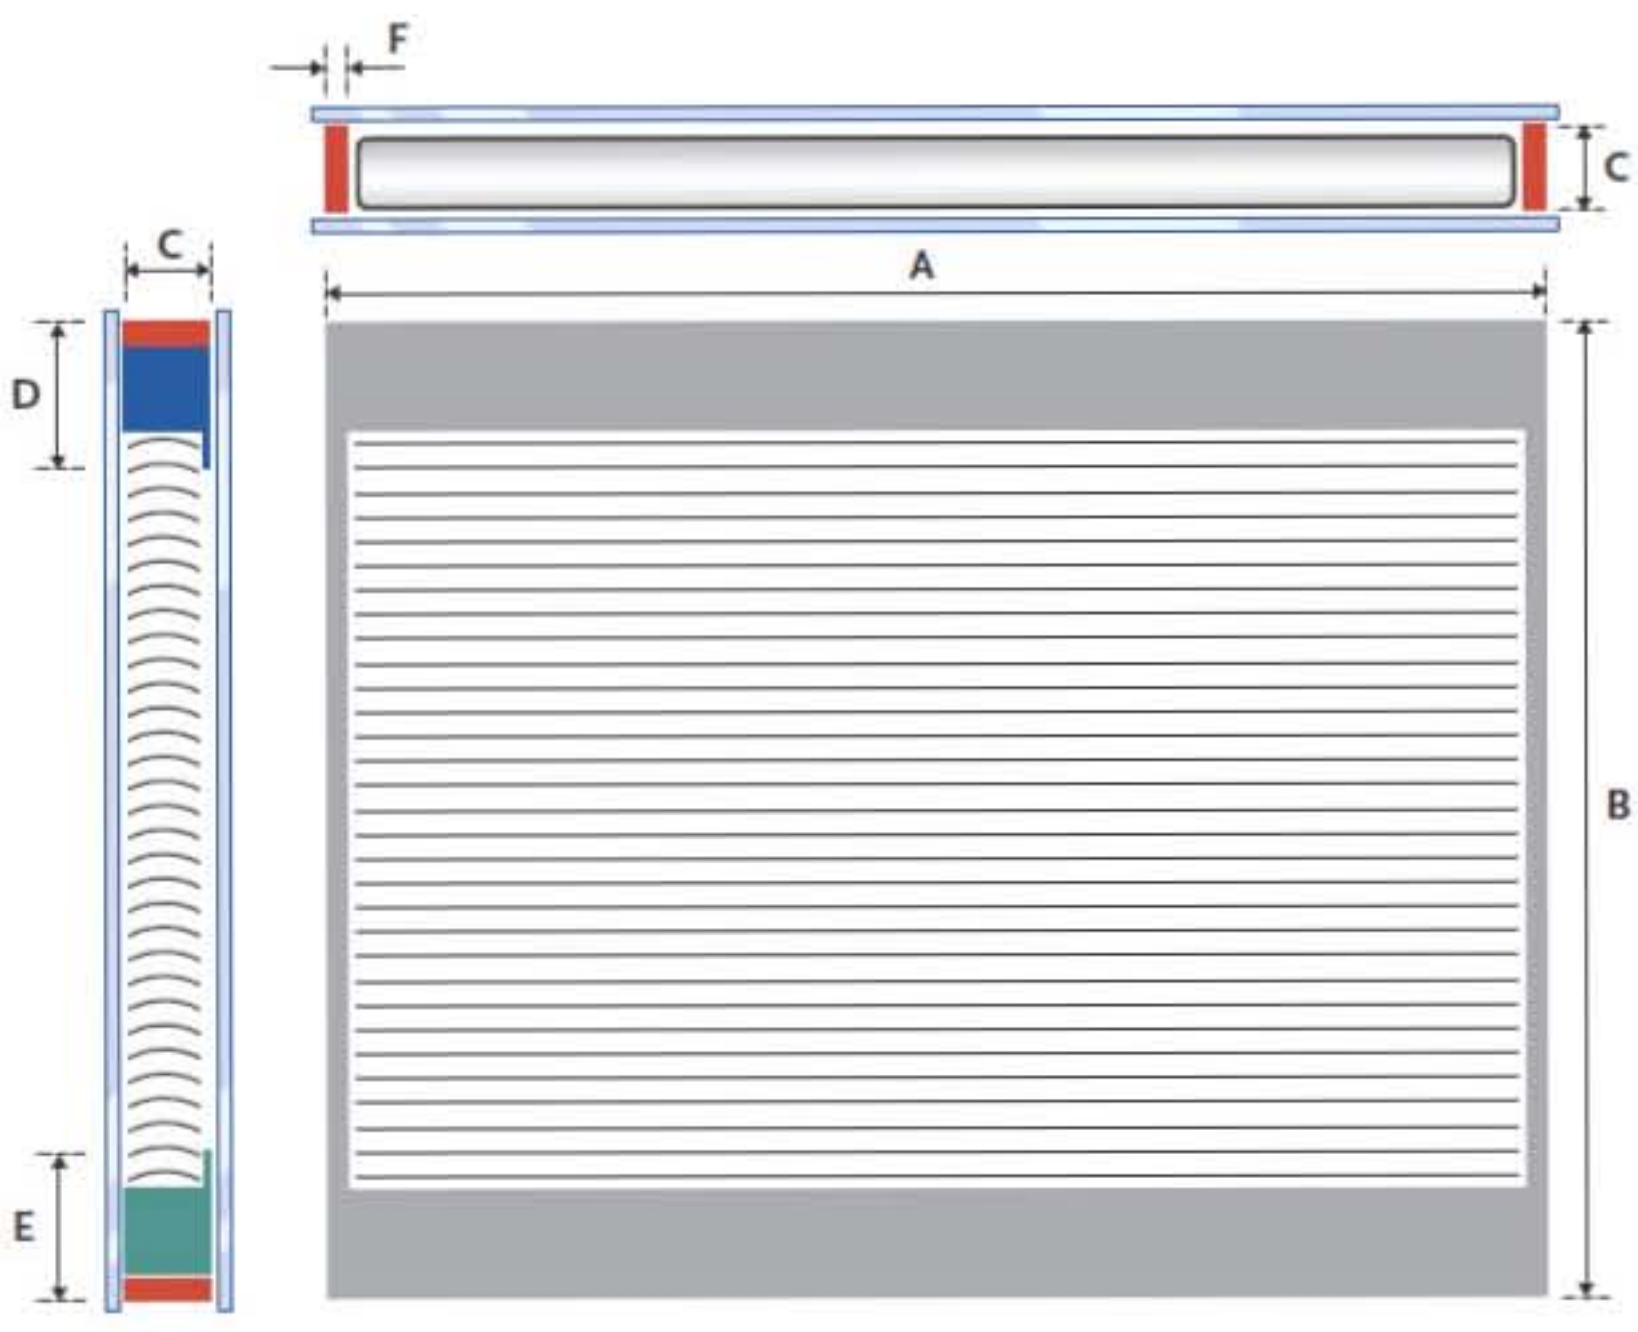

Ref.	Description	Size in mm
A	Width	As needed ¹⁾
B	Height	As needed ¹⁾
C	Depth	17,6
D	Top	40,0
E	Bottom	40,0
F	Side	8,0

Limitations in cm ¹⁾		
	Width	Height
Maximum	200	220
Minimum	30	50

Orientation sides

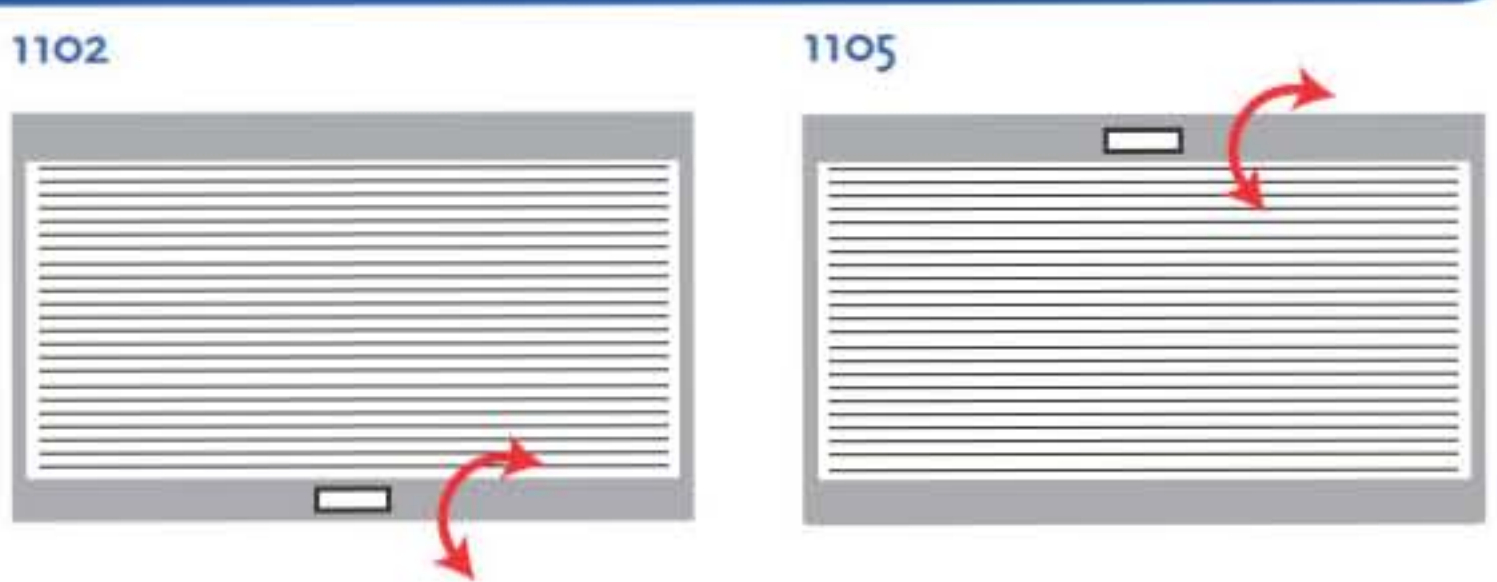

Profiles



Description	Type	Size in mm	Material
Head rail		32 x 25,4 x 17,6	PVC
Bottom channel		32 x 25,4 x 17,6	PVC
Frame		17,6 x 8	PVC
Magnetic holder profile		11 x 6	Aluminium